











## Electrical Optical Characteristics at Ta=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Reverse Light Current	I <sub>L</sub>	---	16.7	---	μA	V <sub>R</sub> =5V Ee=1mW/cm <sup>2</sup> p=940nm
Reverse Light Current	I <sub>L</sub>	---	13	---	μA	V <sub>R</sub> =5V Ee=1mW/cm <sup>2</sup> p=660nm
Reverse Light Current	I <sub>L</sub>	---	10	---	μA	V <sub>R</sub> =5V Ee=1mW/cm <sup>2</sup> d=525nm
Reverse Dark Current	I <sub>D</sub>	---	---	10	nA	V <sub>R</sub> =10V Ee=0mW/cm <sup>2</sup>
Reverse Voltage	V <sub>(R)</sub>	30	---	---	V	I <sub>R</sub> =100μA
Forward Voltage	V <sub>F</sub>	---	---	1.3	V	I <sub>F</sub> =10mA
Viewing Angle(X)	2 <sub>1/2</sub>	---	135	---	Deg.	(Note 1)
Viewing Angle(Y)	2 <sub>1/2</sub>	---	135	---	Deg.	
Rise Time/Fall Time	tr/tf	---	30	---	ns	V <sub>R</sub> =10V RL=1k
Total Capacitance	C <sub>T</sub>	---	12	---	pF	V <sub>R</sub> =5V Ee=0mW/cm <sup>2</sup> f=1.0MHz

**Note:**

- 1<sub>1/2</sub> is the off-axis angle at which the Reverse Light Current is half the axial Reverse Light Current.
- The I<sub>L</sub> guarantee should be added ±15% tolerance.

Typical Electrical / Optical Characteristics Curves  
(25°C Ambient Temperature Unless Otherwise Noted)

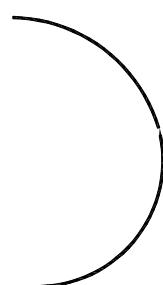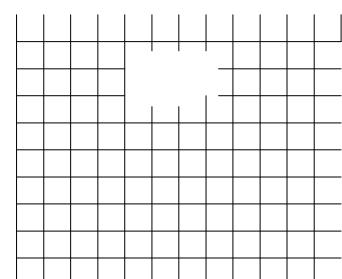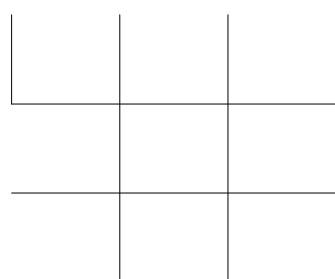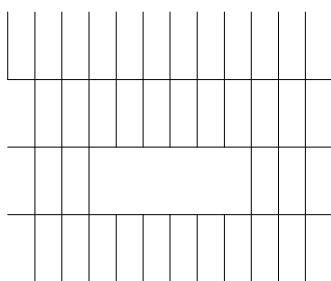


LIGHT


Part No.	SL-T3528PDC020-L110	Page	6 of 9
----------	---------------------	------	--------

## Label Explanation

LIGHT Universal Label

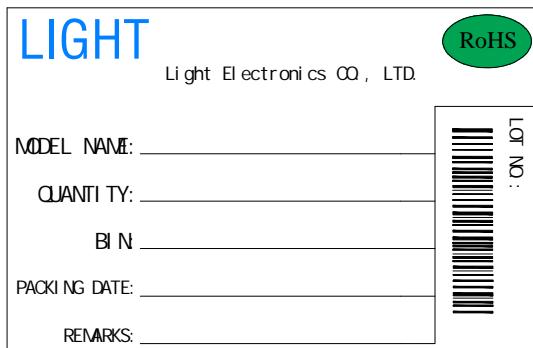

Customer Defined Label

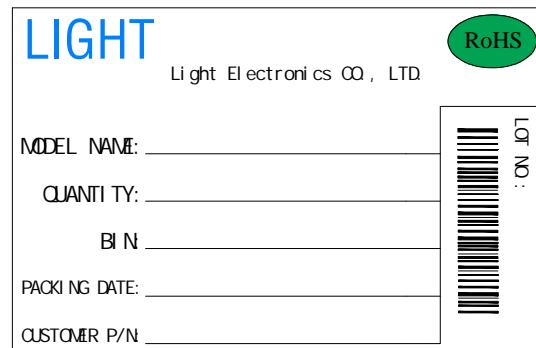

## Reel Dimensions

