



P160

P160

600 V  
LED 10mA  
2500 Vrms



AC

### ● Schematic

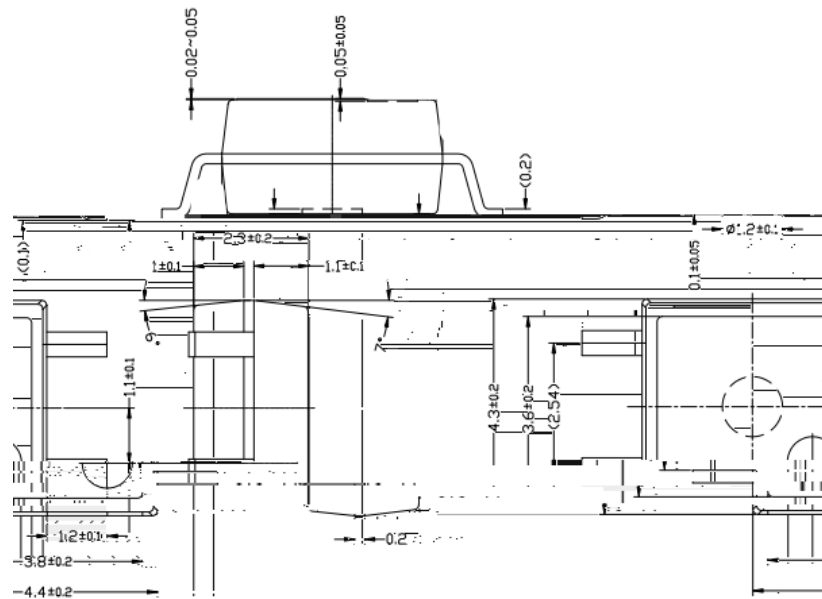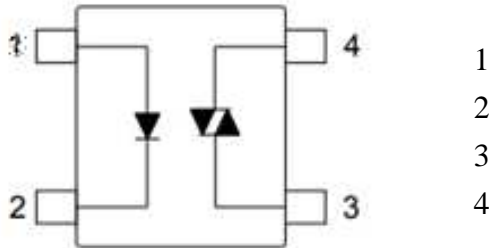


LED				IF	50	mA
				VR	5	V
				IFP	1	A
				IF/	-0.7	mA/
				VDRM	600	V
	RMS	Ta=25	IT	70	mA	
		Ta=70		40		
		Ta 25	IT/	-0.7	mA/	
			Tstg	-40~150		
			Topr	-40~85		
			Tsol	260(10s)		
			PD/	-4.0	mW/	
			BVS	2500(AC, s	μ	



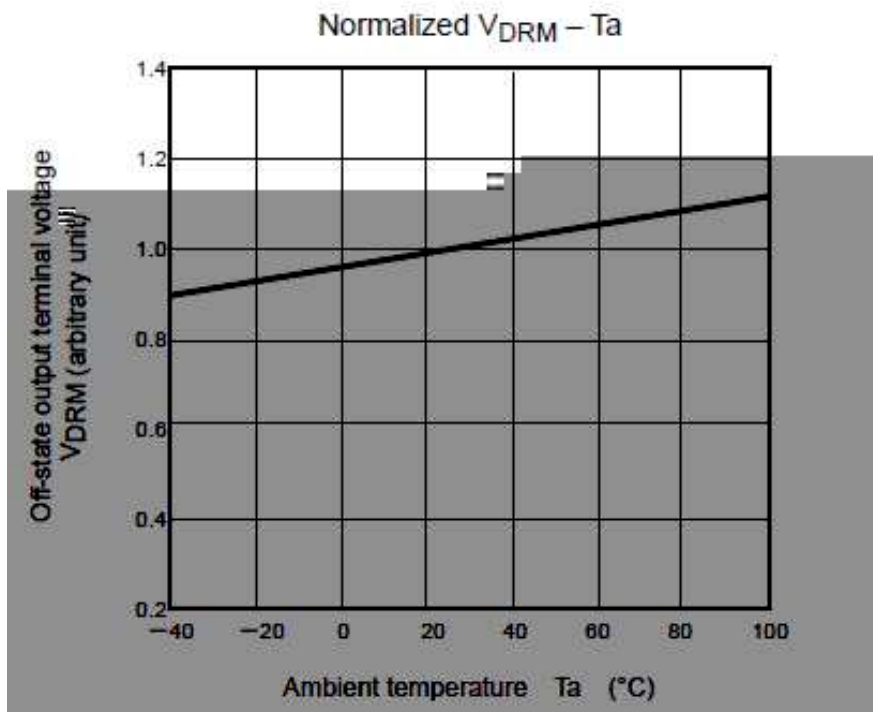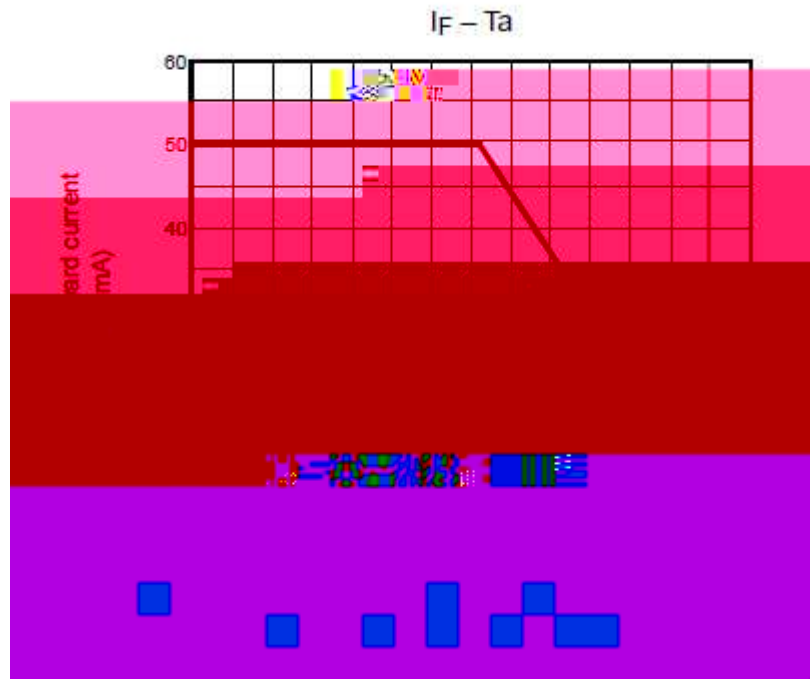


LI

LIGHT ELECTRONICS CO., LTD.




--	--	--	--

$I_{FP} - D_R$

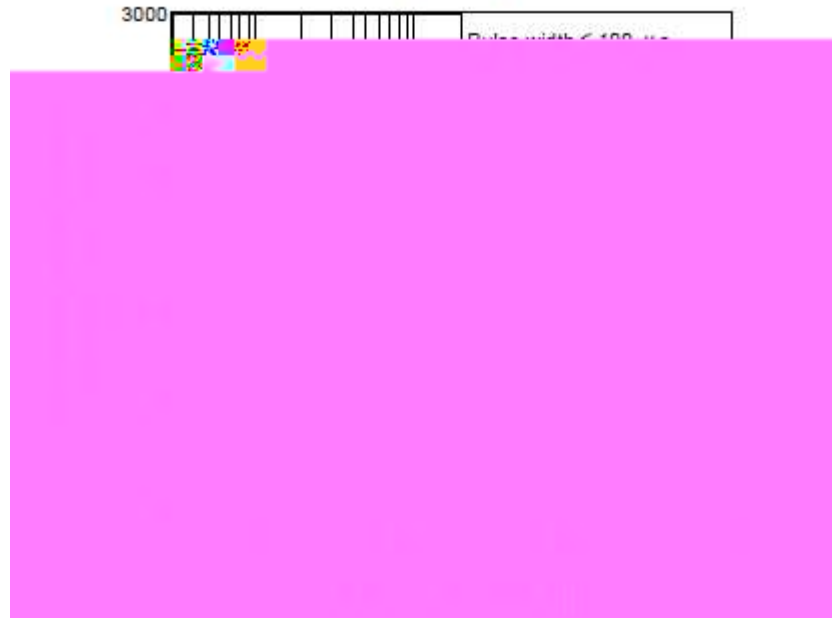

$\Delta V_F / \Delta T_a - I_F$

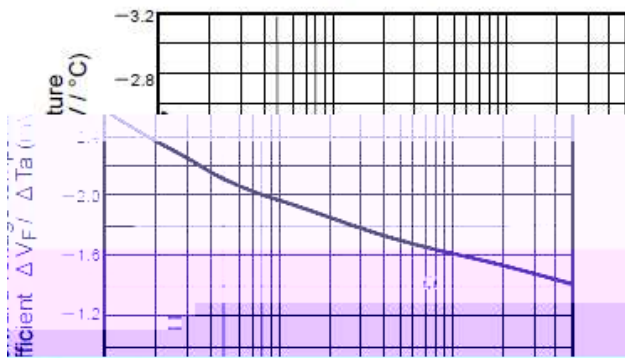

$I_{FP} - V_{FP}$

